

Technical Data Sheet

Silicone Rubber Sponge General Purpose Grade



Material


Closed Cell Silicone Sponge



Available Grades

SIL10, SIL16, SIL20, SIL24, SIL33

Temperature Range

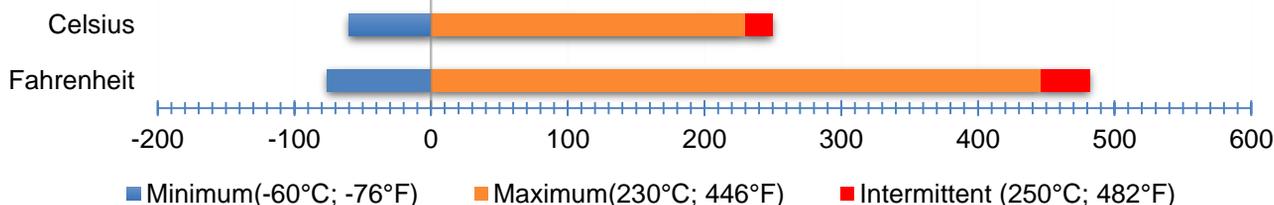

General Information

The density range in white has been approved by the WRAS (Water Regulations Advisory Service) for use in contact with potable water at temperatures up to 85°C (185°F). The listing number is 1810553.

These products meet the flammability requirements of FAR 25/JAR 25/CS 25 Appendix F, Part 1, (a)(1)(iv) and (a)(1)(v) horizontal flammability test and Automotive Standard PART 571FMVSS302

The sponge is closed cell with low water absorption and dust ingress protection up to IP65, subject to design.

Environmental Resistance

Silicone rubber products have an excellent resistance to:

- Ozone
- Oxidation
- Ultraviolet light
- Corona discharge
- Cosmic radiation
- Ionising radiation
- Weathering in general

This information and our technical advice, whether verbal, in writing or by way of trials, is given in good faith but without warranty. This also applies where proprietary rights are involved. Our advice does not release you from the obligations to check its validity and to test our products as to their suitability for their intended use. The storage, application and use of our products are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with our General Conditions of Sale. The information contained within this data sheet is subject to change without notice. Issue date 01.01.2019.

SILEX SILICONES LTD

Silex Ltd, Unit 10, Oakhanger Farm Business Park, Oakhanger, Bordon, Hampshire, GU35 9JA. Tel 00 44 1420 470360, Fax 00 44 1420 472802

E-Mail: sales@silex.co.uk, Website: www.silex.co.uk, Registered company number: 1951973. Place of registration: England & Wales. Directors: K Soudah, S.J. Fearn, P Millson, Ray Soudah

Technical Data Sheet

Silicone Rubber Sponge General Purpose Grade



Availability Format

EXTRUSIONS

- Cord, section, strip, profiles
- Joined rings and gaskets
- Pressure sensitive adhesive backing
- Full range of standard colours
- Capability to colour match
- Full range of standard colours
- Capability to colour match

Typical Applications

- Automotive
- Electronics
- Energy
- Construction
- Heating and Ventilation (HVAC)
- Industrial
- Insulations
- Lighting and Marine

This information and our technical advice, whether verbal, in writing or by way of trials, is given in good faith but without warranty. This also applies where proprietary rights are involved. Our advice does not release you from the obligations to check its validity and to test our products as to their suitability for their intended use. The storage, application and use of our products are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with our General Conditions of Sale. The information contained within this data sheet is subject to change without notice. Issue date 01.01.2019.

SILEX SILICONES LTD

Silex Ltd, Unit 10, Oakhanger Farm Business Park, Oakhanger, Bordon, Hampshire, GU35 9JA. Tel 00 44 1420 470360, Fax 00 44 1420 472802

E-Mail: sales@silex.co.uk, Website: www.silex.co.uk, Registered company number: 1951973. Place of registration: England & Wales. Directors: K Soudah, S.J. Fearn, P Millson, Ray Soudah

Technical Data Sheet

Silicone Rubber Sponge General Purpose Grade



Mechanical Properties

Extrusions		SIL10	SIL16	SIL24	SIL33	
Property	Units	Typical Value	Typical Value	Typical Value	Typical Value	Test Method
Density *	kg.m ³ lb.ft ³	200 12.5	250 15.5	400 25	530 33	BSENISO 845
Hardness **	Shore OO Shore A	35 ±5 15.5	42 ±5 5	65 ±5 17	80 ±5 30	ASTM D2240
Compression Stress 40% Strain ***	kPa PSI	50 7.3	90 13	165 24	470 68	BSENISO 3386 Part 1,2
Compression Stress 25% strain	kPa PSI	28 4	38 5.5	83 12	214 31	ASTM D1056
Tensile Strength	MPa PSI	0.6 87	0.6 87	0.75 108	2.0 290	BSENISO 1798
Elongation to failure	%	140	145	120	130	BSENISO 1798
Compression Set 50% Compression 24hrs Recovery, 22 hrs 70°C (158°F)	%	5.0	3.8	3.0	3.0	BSENISO 1856
Compression Set 50% Compression 24hrs Recovery, 22 hrs 70°C (158°F)	%	6.7	4.8	4.3	6.0	BSENISO 1856

This information and our technical advice, whether verbal, in writing or by way of trials, is given in good faith but without warranty. This also applies where proprietary rights are involved. Our advice does not release you from the obligations to check its validity and to test our products as to their suitability for their intended use. The storage, application and use of our products are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with our General Conditions of Sale. The information contained within this data sheet is subject to change without notice. Issue date 01.01.2019.

SILEX SILICONES LTD

Silex Ltd, Unit 10, Oakhanger Farm Business Park, Oakhanger, Bordon, Hampshire, GU35 9JA. Tel 00 44 1420 470360, Fax 00 44 1420 472802

E-Mail: sales@silex.co.uk, Website: www.silex.co.uk, Registered company number: 1951973. Place of registration: England & Wales. Directors: K Soudah, S.J. Fearn, P Millson, Ray Soudah

Technical Data Sheet

Silicone Rubber Sponge General Purpose Grade



General Characteristics

Test	Result	Standard
Brittle Point	-80°C (-112 °F)	ASTM D746
Limiting Oxygen Index	24.0 %	BS 2782 Part 1
Thermal Conductivity	$6,4 \times 10^{-2} \text{W.m}^{-1}.\text{K}^{-1}$	BS 874 Part 2
Radiation Resistance	$>10^5$ Grays (10^7 Rads) typical	

Accreditations

- FAR 25/JAR 25/CS 25 Appendix F, Part 1, (a)(1)(iv)(a)(1)(v) horizontal flammability test
- UL94 HB
- Automotive Standard PART 571FMVSS302
- REACH compliant and ROHS compliant

Additional Information

This information and our technical advice, whether verbal, in writing or by way of trials, is given in good faith but without warranty. This also applies where proprietary rights are involved. Our advice does not release you from the obligations to check its validity and to test our products as to their suitability for their intended use. The storage, application and use of our products are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with our General Conditions of Sale. The information contained within this data sheet is subject to change without notice. Issue date 01.01.2019.

SILEX SILICONES LTD

Silex Ltd, Unit 10, Oakhanger Farm Business Park, Oakhanger, Bordon, Hampshire, GU35 9JA. Tel 00 44 1420 470360, Fax 00 44 1420 472802

E-Mail: sales@silex.co.uk, Website: www.silex.co.uk, Registered company number: 1951973. Place of registration: England & Wales. Directors: K Soudah, S.J. Fearn, P Millson, Ray Soudah